


VENTILATION SPACE SHEET

An especially designed sheet, for use as a ventilation sheet. Leaving a 20mm gap between each sheet enables air to pass freely in and out of the building. Suitable for both horizontal and vertical applications.

Designed in accordance with the following:

- Code of design and technical requirements for light gauge metal roofs, published by the Metal Roof Deck Association.
- BS 1449
- BS 449 Appendix 1

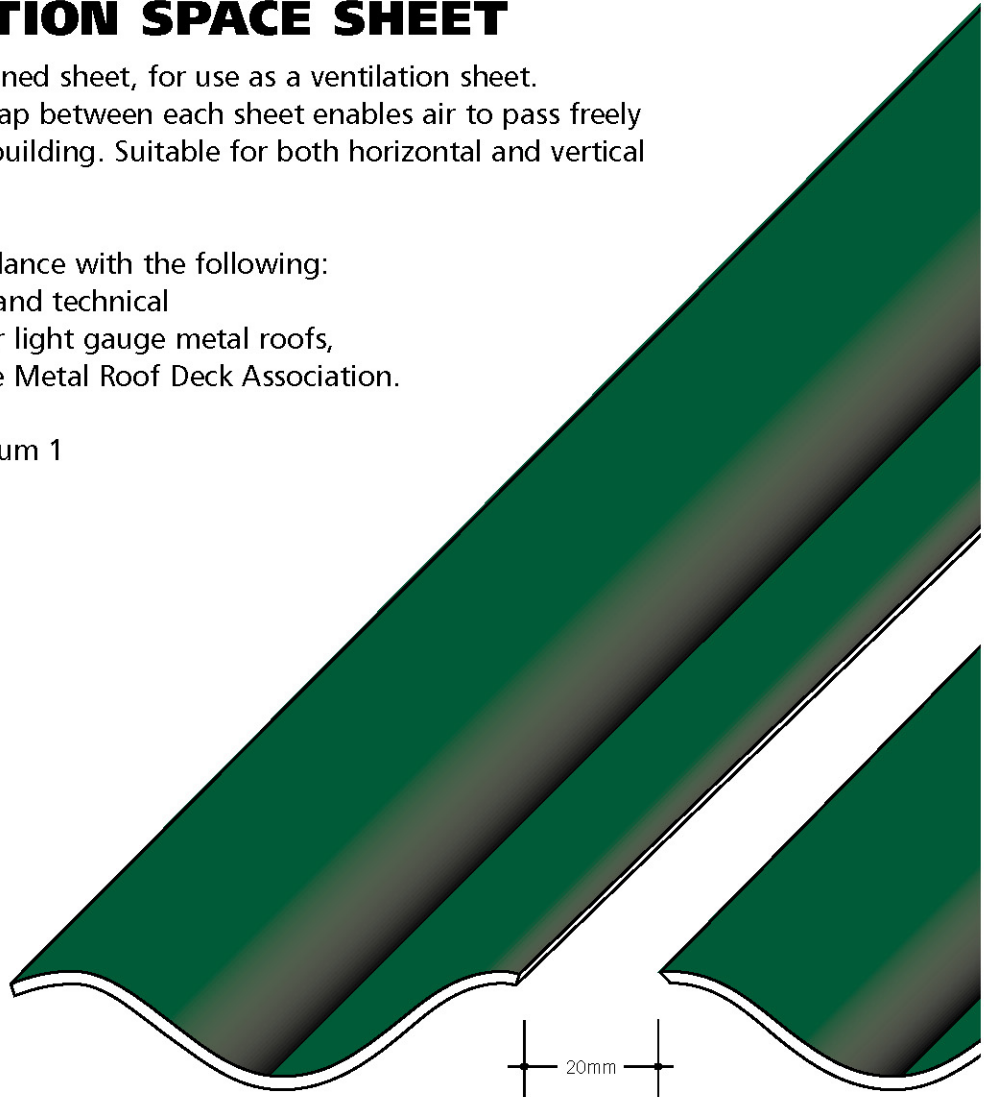

See Steadman's colour guide chart for available colours

LOAD TABLES	SPAN CONDITION	THICKNESS OF PROFILE	WT. PER SQ. M	SPAN (IN METRES)				
				1.2	1.4	1.6	1.8	2.0
AS13/3 ROOF SHEET	SINGLE ↑ ↑	0.5	4.8	1.2	0.74	0.50	0.35	0.26
		0.55	5.49	1.26	0.79	0.54	0.37	0.28
		0.7	6.99	1.49	0.94	0.63	0.46	0.33
	CONTINUOUS ↑ ↑ ↑	0.5	4.8	1.96	1.25	0.85	0.58	0.42
		0.55	5.49	2.09	1.32	0.89	0.62	0.45
		0.7	6.99	2.47	1.56	1.06	0.73	0.53