


- Conceived as a comprehensive wall and roofing system or to be used in conjunction with other building materials.
- Wide range of colours available.
- Selection of surface finishes.
- Cut to length from client specification giving greater flexibility.
- Also available as a double louvre vented wall sheet, creating greater movement of air and improving ventilation in farm livestock buildings.

AS24/1000W WALL SHEET

A lightweight sheet designed to complement architectural features. Available in a range of attractive colours with a choice of surface finishes. Double louvred vented sheets available for agricultural stock buildings. Suitable for vertical applications.

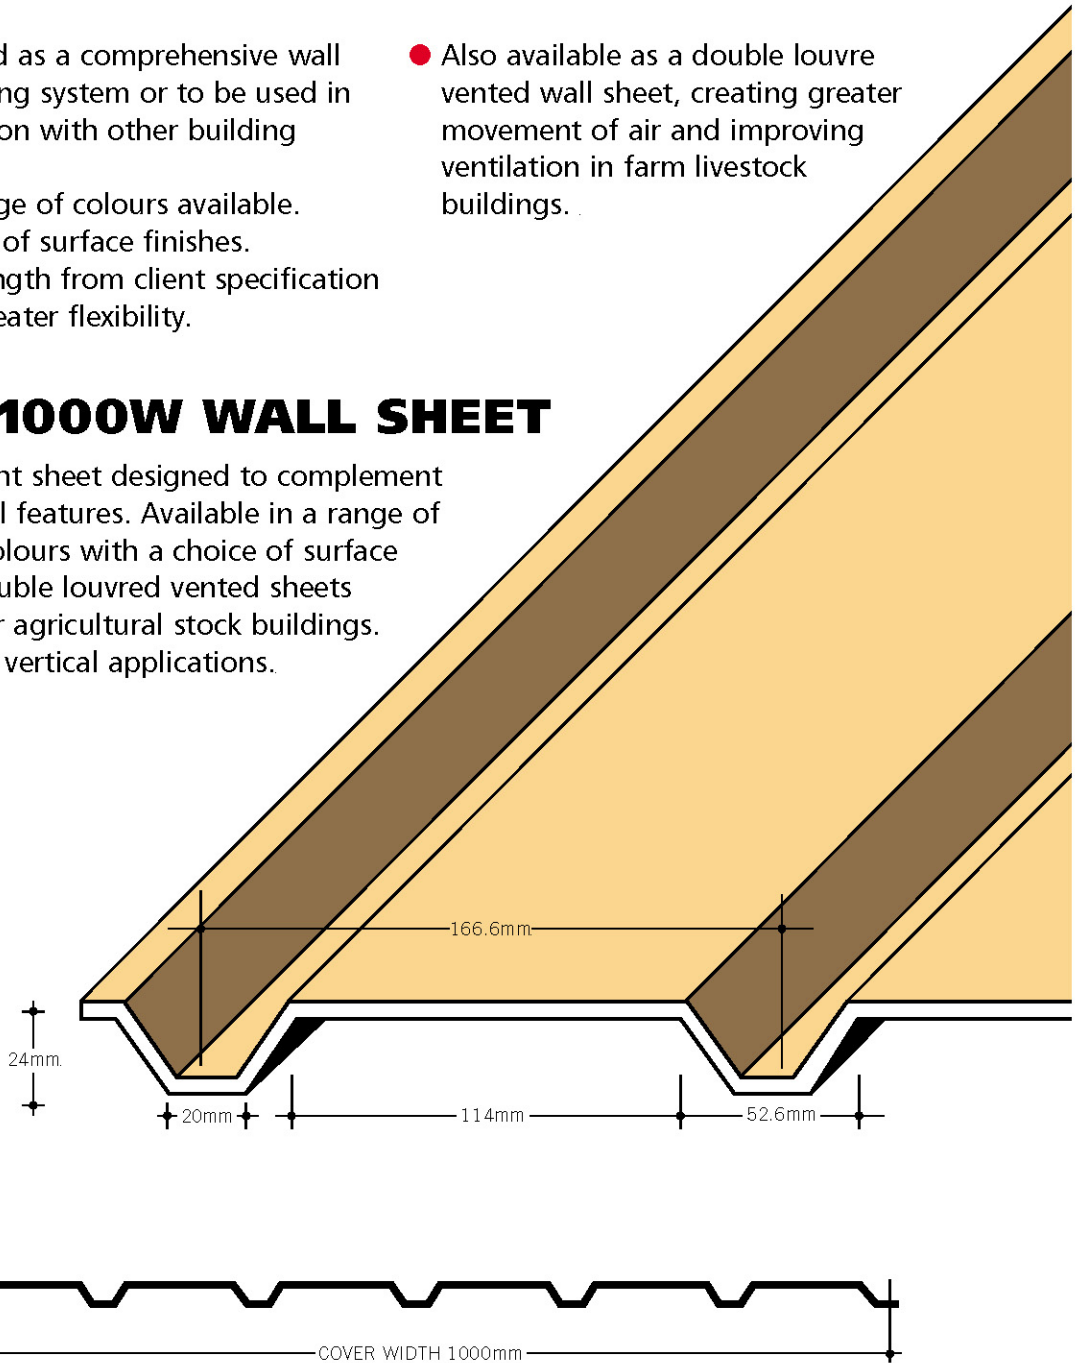

LOAD TABLE	SPAN CONDITION	THICKNESS OF PROFILE	WT. PER SQ. M	DEFLECTION LIMIT	SPAN (IN METRES)										
					1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
AS24/1000w WALL SHEET	CONTINUOUS	0.5	3.95	$\frac{L}{200}$	4.44	3.00	1.94	1.01	0.93	0.68	0.47	-	-	-	-
		0.7	5.5	$\frac{L}{200}$	6.00	4.50	2.71	1.89	1.26	0.99	0.73	0.58	0.42	-	-
	SINGLE	0.5	3.95	$\frac{L}{200}$	3.50	1.82	1.13	0.78	0.52	0.38	0.24	-	-	-	-
		0.7	5.5	$\frac{L}{200}$	5.00	3.00	1.57	1.12	0.76	0.54	0.38	0.29	-	-	-

Gauge: 0.5mm, 0.7mm
 Cover: 1m
 Maximum Length: 12.2m
 Weight: dependant on gauge
 Colour: all standard colours ex-stock
 Substrate: hot dipped galv. to BS2989 or Aluzinc®