


- Designed to be used individually or combined with other materials to form a fully integrated system.
- Lengths cut to client requirements to give maximum flexibility for optimum performance.
- Available in a large range of colours and finishes.

AS34/1000W WALL SHEET

A heavy duty sheet made to withstand the rigours of the building process but attractively designed to complement architectural features. Available in a range of popular colours and finishes. Designed in accordance with the following:

- Code of design and technical requirements for light gauge metal roofs, published by the Metal Roof Deck Association.
 - BS 1449
 - BS 449 Appendix 1
- Suitable for vertical applications

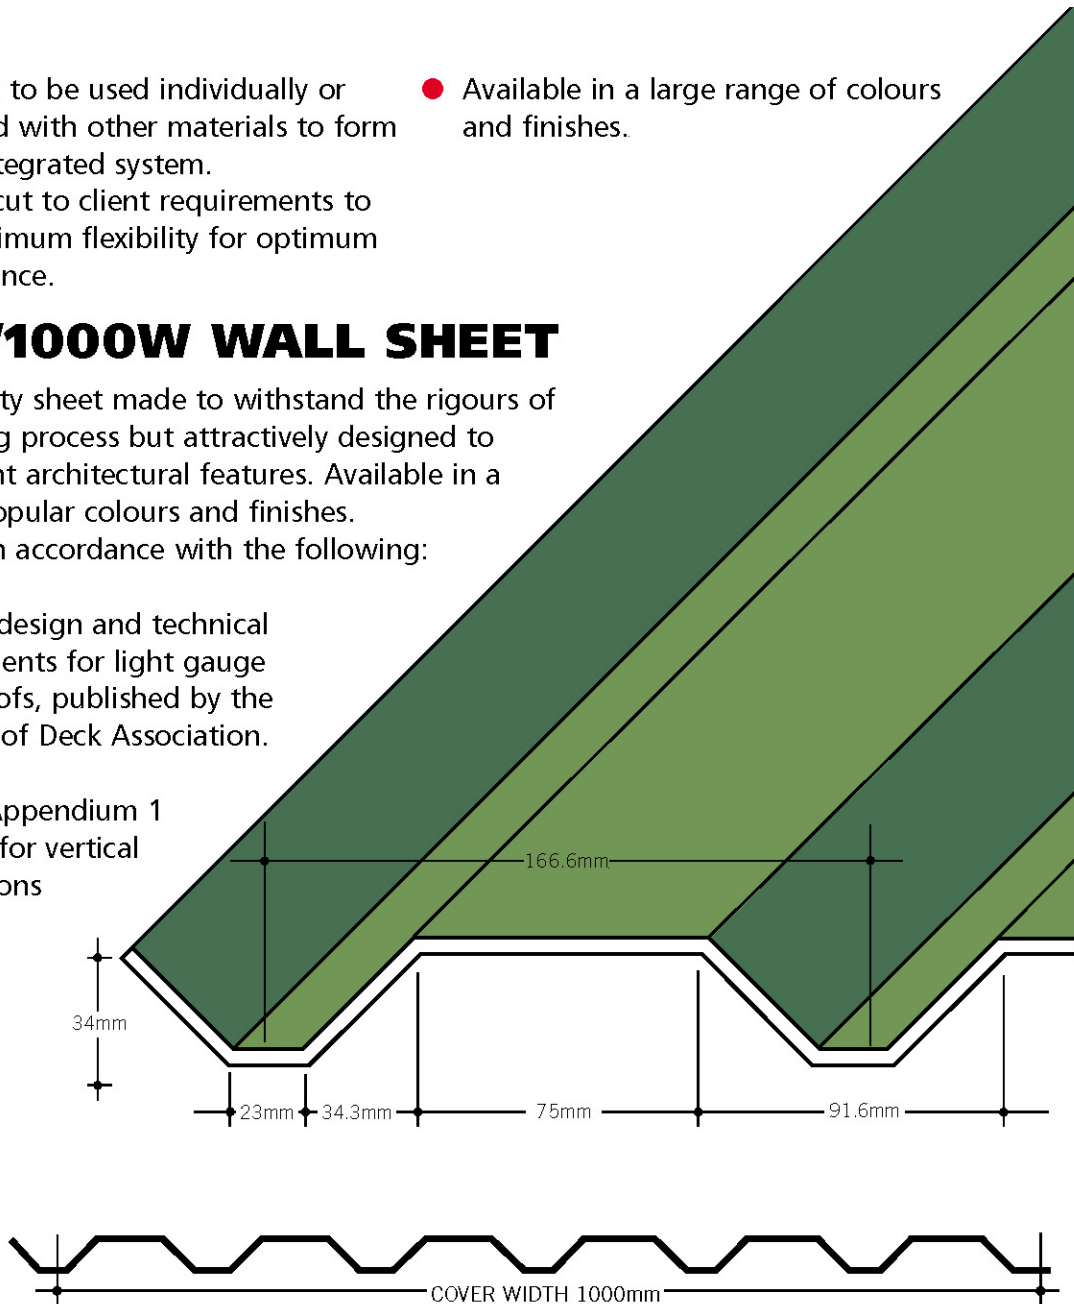

LOAD TABLES	SPAN CONDITION	THICKNESS OF PROFILE	WT. PER SQ. M	DEFLECTION LIMIT	SPAN (IN METRES)										
					1.0	1.2	1.4	1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
AS34/1000w WALL SHEET	CONTINUOUS	0.5	3.95	200	6.10	4.75	3.82	2.83	2.04	1.47	1.11	0.80	0.56	0.40	0.30
		0.7	5.5	200	6.80	5.70	4.58	3.64	2.85	2.22	1.62	1.24	0.95	0.75	0.55
	SINGLE	0.5	3.95	200	5.40	3.85	2.60	1.75	1.27	0.98	0.71	0.50	0.35	0.20	0.15
		0.7	5.5	200	6.65	5.01	3.60	2.52	1.82	1.35	1.00	0.70	0.50	0.41	0.26

Gauge: 0.5mm, 0.7mm
 Cover: 1m
 Maximum Length: 12.2m
 Weight: dependant on gauge
 Colour: all standard colours ex-stock
 Substrate: hot dipped galv. to BS2989 or Aluzinc®